

# Importance Ranking of Features for Human Micro-Doppler Classification with a Radar Network

Sevgi Zübeyde Gürbüz<sup>1,2</sup>, Bürkan Tekeli<sup>1</sup>, Melda Yüksel<sup>1</sup>, Cesur Karabacak<sup>1</sup>, Ali Cafer Gürbüz<sup>1</sup>

<sup>1</sup>Dept. of Electrical and Electronics Engineering,  
TOBB University of Economics and Technology

<sup>2</sup>TUBITAK Space Technologies Research Institute  
Ankara, Turkey

Mehmet Burak Guldogan<sup>3</sup>

<sup>3</sup>Dept. of Electrical and Electronics Engineering  
Turgut Ozal University  
Ankara, Turkey

**Abstract**—Over the past decade, the human micro-Doppler signature has been a subject of intense research. In particular, much work has been done in relation to computing features for use in a variety of classification problems, such as arm swing detection, activity classification, and target identification. Although dozens of features have been proposed for these purposes, little work has examined the issue of which features are more important – i.e., have a greater impact on classification performance – than others. In this work, an information theoretic approach is applied to compute the importance ranking of features prior to classification for the specific problem of discriminating human walking from running. Results show that the ranking of features according to mutual information directly relates to classification performance using support vector machines.

**Keywords**—human micro-Doppler, feature selection, classification, multistatic radar, radar network

## I. INTRODUCTION

The micro-Doppler effect [1-3] refers to the frequency modulations of the received radar signal caused by the vibration or rotation of any part of the target, also known as micro-motion dynamics. For example, the rotational motion of vehicle wheels, tank treads or helicopter blades all results in radar micro-Doppler [4-7] in addition to the Doppler shift caused by translational motion of the target. Human motion, which is comprised of complex time-varying movements of the body, arms, legs, hands and feet, also result in the presence of micro-Doppler in the radar signature. Studies have shown that the human micro-Doppler signature is a unique signature, differentiable from all other micro-Doppler signatures, including those caused by four-legged animals [8-9]. In fact, the human micro-Doppler signature also exhibits variations dependent upon the activity being engaged in. Thus, in addition to target identification, micro-Doppler can also be used to detect and classify target activity as well.

Over the years, numerous features have been proposed for the purposes of classifying micro-Doppler signatures. The most commonly used time-frequency representation of micro-Doppler is the spectrogram: the short-time Fourier transform

of the slow-time slice of the pulse compressed radar return signal. Most of the features proposed in the literature are directly extracted from the received signal's spectrogram. For example, Tahmoush and Silvius [8] proposed using eight different features to distinguish humans from animals: average velocity, maximum foot swing velocity, animal and human torso velocities, the period, the phase between leg and torso, foot swing time, and the range profile of the animal. Otero [9] proposed two features for human – dog discrimination, which are extracted from the cadence frequency plot, defined as the fast Fourier transform (FFT) of the spectrogram. The first feature, stride rate, is computable from the fundamental frequency of the cadence frequency plot, while the second feature, appendage-torso ratio, is given by the ratio of the torso radar cross section (RCS) to the sum of appendage RCS. Otero considered the amplitude of cadence frequency plot at the fundamental frequency and harmonics to be indicative of torso and appendage RCS, respectively. However, experiments by Andric [10] have shown the cadence frequency plot to be unreliable in the presence of multiple targets.

For classification of human activities, Kim and Ling [11-12] have proposed six different features: torso Doppler frequency, total bandwidth of the Doppler signal, offset of the total Doppler, bandwidth without micro-Dopplers, normalized standard deviation of the Doppler signal strength, and period of the limb motion. These features were successfully used to classify seven different activities: running, walking, walking without moving arms, crawling, boxing, boxing while moving forward and sitting with slight fidgeting movements. Other researchers have used features such as the distance between the upper and lower frequency envelopes of the Doppler signatures to determine if a person is walking with or without arm swing [13-14], melfrequency cepstral coefficients to discriminate falling from other human activities such as walking or bending [15], the shape of the spectrogram envelope, mean torso velocity, maximum envelope velocity, torso oscillations, limb trajectories, and ratio of torso echoes to other echoes in the spectrogram [16], and Fourier series coefficients of spectrogram envelope [17] to characterize human gait. Non-parametric features derived from subspace representations of the time-frequency distribution have also been proposed [18-20]. For example, Tivive [18] proposed a three-stage algorithm employing both fixed directional and adaptive filters that extract micro-Doppler features via learning.

---

This work was supported in part by EU FP7 Project No. PIRG-GA-2010-268276 (COGSENSE).

Once a certain set of features have been extracted, a number of different classification algorithms can then be applied, including, artificial neural networks [11], support vector machines (SVM) [12], principle component analysis (PCA) [19, 21], linear discriminant analysis (LDA) [19], statistics [22], distance measures [23], k-means [24], Bayesian probability theory [25], and information theory [26]. However, in terms of impact on classification performance, the *choice of which features are used is much more significant* than the specific classification algorithm applied [27].

Dozens of different features have been proposed in the literature, but given a specific classification problem, which features, and how many should be used? There are relatively few works that analyze the contribution of features towards classification performance. In Kim and Ling [12], the significance of features was determined based on classification performance achieved after processing with SVM. This work focuses on determining the importance ranking of features *prior to* classification, thereby enabling an approach for feature selection specific to the classification problem at hand. In particular, this problem is considered in the framework of information theory [34]. The information theoretical approach has had some success when applied to feature extraction from video [28] and radar [35, 36]. In this work, application of mutual information calculations to fusion of multistatic data obtained from the radar network is discussed.

## II. MULTISTATIC HUMAN MICRO-DOPPLER

In general, the signal received by a radar from is a time-delayed, frequency-shifted copy of the transmitted signal. For the purposes of this study, a pulsed Doppler radar transmitting a linear frequency modulated (LFM) or chirp signal is considered (Fig. 1). Thus, for a point target the received radar return may be written as

$$s_r(n, t) = a_t \text{rect}\left(\frac{\hat{t} - t_d}{\tau}\right) \cdot \exp\left\{j\left[-2\pi f_c + \pi\gamma(\hat{t} - t_d)^2\right]\right\}, \quad (1)$$

where the time  $t$  is defined as  $t = T(n-1) + \hat{t}$  in terms of the pulse repetition interval (PRI),  $T$ , pulse number,  $n$ , and time relative to the start of each PRI,  $\hat{t}$ ;  $a_t$  is the amplitude as given by the radar range equation;  $\tau$  is the pulse width;  $c$  is the speed of light;  $\gamma$  is the chirp slope;  $f_c$  is the transmitted center frequency; and  $t_d$  is the round-trip time delay from antenna and target, defined in terms of the range,  $R$ , as  $t_d = 2R/c$ .

### A. Human Radar Return

Humans are complicated targets because of the intricate motion of body parts moving along different trajectories at different speeds, which results in a micro-Doppler shift. A validated model for the radar return from a human was proposed by Van Dorp [30] based on the kinematic model of walking found by Boulic [31]. Van Dorp models the human body as being comprised of 12 point targets, located at the centroid of each body part (head, upper arms, lower arms, torso, thighs, lower legs and feet), which are modeled as either

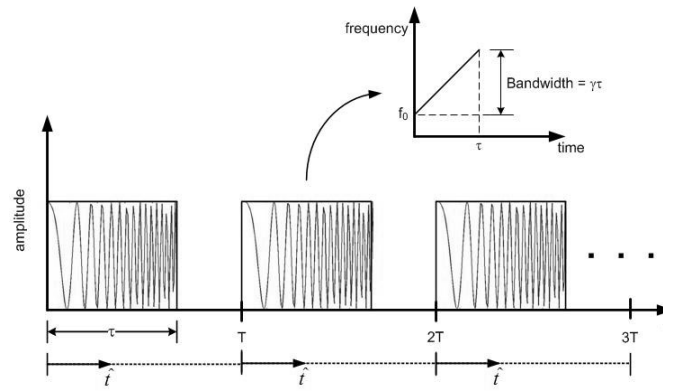


Figure 1. Transmitted pulse Doppler chirp waveform [29]

spherical or cylindrical, depending on which shape best matches. Thus, the total return from a human target may be expressed as

$$s_h(n, t) = \sum_{i=1}^{12} a_{t,i} \text{rect}\left(\frac{\hat{t} - t_{d,i}}{\tau}\right) e^{j[-2\pi f_c t_{d,i} + \pi\gamma(\hat{t} - t_{d,i})^2]}, \quad (2)$$

where  $a_{t,i}$  and  $t_{d,i}$  are the amplitude and time delay of the return of each body part.

The received return from the human target, stored as a slow-time, fast-time data matrix, is then pulse compressed so that the peak occurs at the range bin in which the target is present. Taking a slice across slow-time at the range bin of the peak output,

$$x_p[n] = \sum_{i=1}^{12} a_{t,i} \tau e^{-j\frac{4\pi f_c}{c} R_{d,i}}, \quad (3)$$

where  $R_{d,i}$  is the range from the antenna to the center of each body part. The short-time Fourier transform of overlapping time segments of this slow-time slice yields the spectrogram of the human return, which comprises the starting point for the data processing accomplished in this work.

### B. Video Motion Capture Data

Many researchers use the human walking model developed by Boulic to compute the time-varying range of each body part,  $R_{d,i}$  that is required by (3) to generate simulated human radar data. However, the spectrogram generated by the Boulic model is quite “clean” in comparison that derived from measured radar data, yielding easier obtainable, more accurate feature estimates and thus greater classification performance. A more realistic human spectrogram can be obtained by instead computing the time-varying ranges from motion capture data of human activities.

The Carnegie Mellon University (CMU) Motion Research Laboratory has developed a library of human motion capture data [32], which it distributes free of charge to researchers

worldwide. The CMU database contains data of many different people engaged in a variety of motions, including walking, running, climbing, crawling, jumping, different sports, and composite activities, such as running – stopping – and running again. The data was collected with the aid of 41 sensors placed on the human body and was recorded by 12 infrared cameras at a frequency of 120 Hz. The database contains a total of 2605 different motion records belonging to 112 different subjects.

The difference in human spectrograms generated from motion capture data and those generated using the Boulic walking model can be seen in Figure 2. Notice how the curves in the spectrogram generated from CMU data are not as sharp or well defined as that computed from the Boulic model, thus more closely approximating real data. Moreover, simulated data generated from motion capture data is not limited to just one human activity (walking), but enables the generation of data corresponding to almost any desired activity, so long as a record exists in the database.

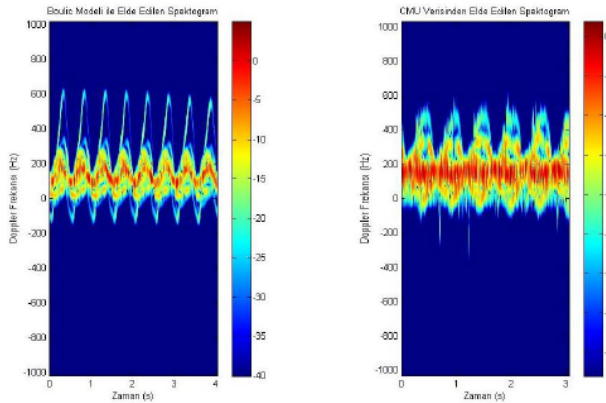


Figure 2. Human spectrograms generated from the Boulic walking model (left) and CMU motion capture data of human walking (right) [33].

### C. Multistatic Data from Radar Network

In this work, a three-antenna radar network is considered for illustration of the proposed feature selection algorithm, as shown in Figure 3. A single human target initially located at a range of 1000 meters from the nearest network antenna is simulated for both walking and running towards the network.

Here, an important consideration is aspect angle, defined as the angle of the target motion relative to the radial path between antenna and target. The aspect angle of target motion has a great impact on the spectrogram measured and thus the quality of the features extracted for the purposes of classification. Consider the spectrograms measured from the network receivers for a human running towards the radar network at a  $0^\circ$  aspect angle and those for a human running tangential to the radar network at a  $90^\circ$  aspect angle, as shown in Figure 4.

When the aspect angle is zero, the motion of the torso, arms, and legs can be distinctly seen in the spectrogram, enabling



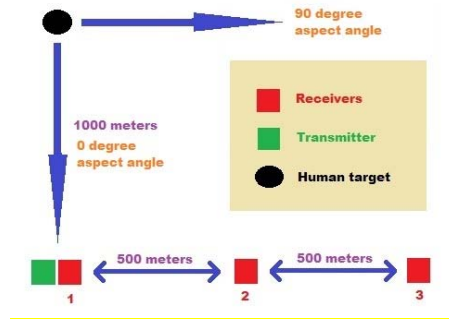


Figure 3. Radar network topology.

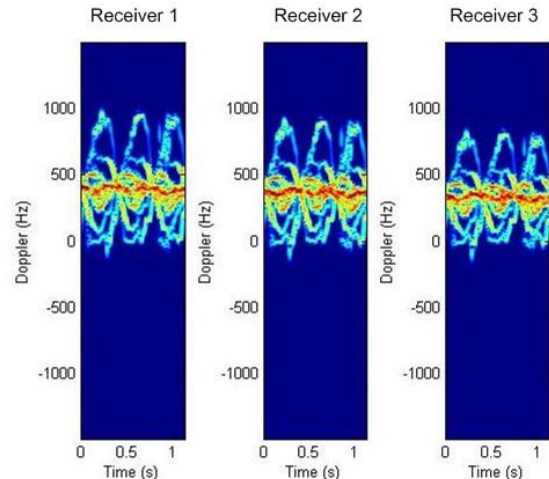

(a) Spectrogram of human running directly towards network ( $0^\circ$  deg. aspect angle)

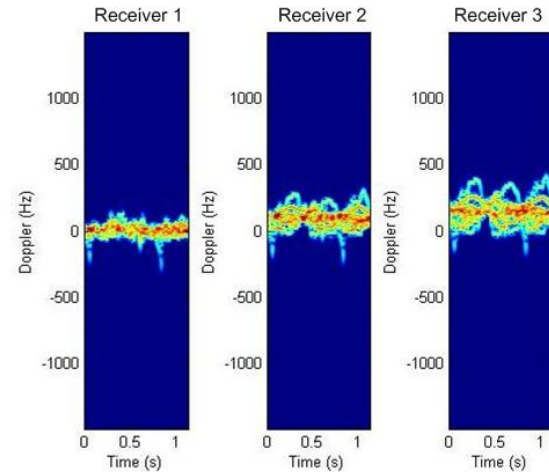

(b) Spectrogram of human running tangential to network ( $90^\circ$  deg. aspect angle)

Figure 4.

reliable estimates of features for use in classification. But when the aspect angle is 90 degrees, the amount of Doppler shift observed is significantly smaller, due to the small radial velocity component observed by the radar. Moreover, the micro-motion of the body parts has seemingly been merged or

blurred together, inhibiting the extraction of relevant features that could be used to distinguish targets.

Thus, when exploiting features extracted by a radar network, it is important to take into account not just the usefulness of a given feature to discriminate between the desired activities, but also to account for differences in the quality of feature estimates, which is strongly dependent upon aspect angle, among other factors. As will be seen, information theory will be able to take into account all factors impacting the contribution of a feature to classification performance.

### III. INFORMATION THEORETIC APPROACH

#### A. Ranking Features According to Mutual Information

The mutual information of two random variables is defined as the quantity that measures the amount of information contained in one random variable about the other. Hence, random variables that are independent of each other have zero mutual information, and as correlation increases mutual information increases. In the context of radar networks, mutual information can be used to provide a quantitative basis for assessing the contribution of data collected from each sensor.

First, let us consider the monostatic case for classifying returns according to whether a human is running or walking. For illustration, let us just study two features:

- 1) the average torso Doppler frequency, and
- 2) the bandwidth of torso oscillations.

and use information theory to determine their relative importance.

Define  $X_1$  and  $X_2$  as random variables corresponding to the average torso Doppler frequency (feature 1) and the bandwidth of torso oscillations (feature 2), respectively. Let  $Y$  be a random variable taking a value of 0 when the subject is walking, and 1 when the subject is running. Then, the mutual information between  $X_1$ ,  $X_2$  and  $Y$  may be defined in two ways [34]:

$$I(X_1, X_2; Y) = I(X_1; Y) + I(X_2; Y|X_1) \quad (4)$$

$$I(X_1, X_2; Y) = I(X_2; Y) + I(X_1; Y|X_2) \quad (5)$$

where,  $I(X_1, X_2; Y)$  represents the mutual information between both feature 1 and feature 2 with  $Y$ .  $I(X_1; Y)$  and  $I(X_2; Y)$  represent the mutual information between feature 1 and  $Y$ , and feature 2 and  $Y$ , respectively.  $I(X_2; Y|X_1)$  represents the mutual information of feature 2 and  $Y$ , given feature 1.  $I(X_1; Y|X_2)$  is defined similarly. Then, to determine whether feature 1 or 2 gives more information about the classification variable  $Y$ ,  $I(X_1; Y)$  and  $I(X_2; Y)$  are compared and the feature, which results in a larger value is selected.

The mutual information for two discrete random variables  $X$  and  $Y$  can be computed as follows:

$$I(X; Y) = \sum_x \sum_y p(x, y) \cdot \log_2 \left( \frac{p(x, y)}{p(x)p(y)} \right) \quad (6)$$

where  $p(x, y)$  is the joint probability mass function (PMF), and  $p(x)$  and  $p(y)$  are the marginal PMFs of  $X$  and  $Y$ , respectively.

The expressions given in (4) and (5) can be generalized to multistatic radar networks with  $m$  antennas and  $n$  number of features as follows [34]:

$$\begin{aligned} & I(X_{11}, \dots, X_{1n}, \dots, X_{m1}, \dots, X_{mn}; Y) \\ & = I(X_{ji}; Y) + I(X_S; Y|X_{ji}) \end{aligned} \quad (7)$$

where  $X_{ji}$  represents the random variable for the  $i^{\text{th}}$  feature of the  $j^{\text{th}}$  antenna,  $Y$  is the classification variable and  $S = \{X_{11}, \dots, X_{1n}, \dots, X_{m1}, \dots, X_{mn}\} \setminus X_{ji}$  for any  $j = 1, \dots, m$  and  $i = 1, \dots, n$ . In other words, the left hand side of (7) can be decomposed into two terms in any order. Then, comparing all  $I(X_{ji}; Y)$  with each other and choosing the  $j$ - $i$  pair that results in the maximum value, the most important feature and the most reliable antenna can be determined.

#### B. Simulation Results for 3-Antenna Network

Simulation results are presented for the three-antenna radar network, shown in Figure 3, observing a single human engaging in one of two possible motions: 1) walking, and 2) running. Each motion is simulated for sixteen different people, target motions ranging between  $0^\circ$  and  $90^\circ$  aspect angles relative to the radar yielding a total of 1456 simulations over the variable parameter space. From the spectrogram generated in each simulation, feature 1 and feature 2 are estimated and ordered according to mutual information.

The mutual information for a given feature is computed by first compiling a histogram of feature values for when the subject is running and walking. It is assumed that it is equally likely for the person to be walking as running. Thus,  $p(y=0) = p(y=1) = 0.5$ . Since the histograms for the two motions are compiled separately for each antenna  $j$ , the histograms represent conditional probabilities, from which the desired joint and marginal distributions may be computed for both features ( $i = 1, 2$ ) as follows:

$$\begin{aligned} p(x_{ji}, y = 0) &= p(x_{ji} | y = 0) p(y = 0) \\ &= 0.5 p(x_{ji} | y = 0) \end{aligned} \quad (9)$$

$$\begin{aligned} p(x_{ji}, y = 1) &= p(x_{ji} | y = 1) p(y = 1) \\ &= 0.5 p(x_{ji} | y = 1) \end{aligned} \quad (10)$$

$$p(x_{ji}) = \sum_{y=0}^1 p(x_{ji}, y) \quad (13)$$

In the case of a radar network, the total number of histograms generated is equal to the number of features times the number of antennas times the number of classes. In this example, we extracted two features from three antennas to classify two different motions, so the total number of histograms generated is  $2 \times 3 \times 2 = 12$  histograms. For

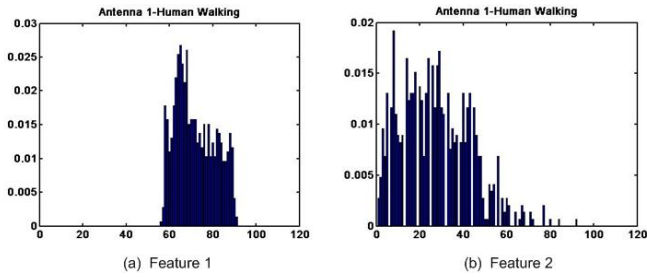


Figure 5. Conditional PMF for feature 1 ( $p(x_{11}|y=0)$ ) and feature 2 ( $p(x_{12}|y=0)$ ), at antenna 1, when subject is walking.

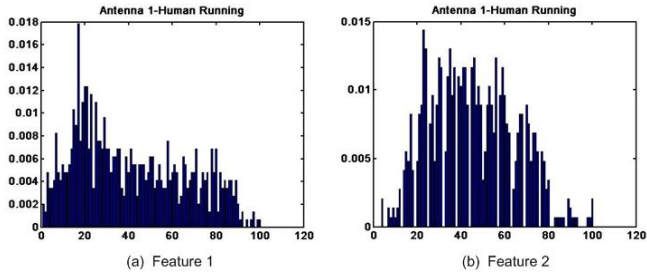


Figure 6. Conditional PMF for feature 1 ( $p(x_{11}|y=1)$ ) and feature 2 ( $p(x_{12}|y=1)$ ), at antenna 1, when subject is running.

illustration, consider the histograms computed for Receiver 1, as shown in Figures 5 and 6.

Using these data, (8) may be used to compute the mutual information of each feature and each antenna, as tabulated in Table 1. From these calculations, a number of important observations can be made. Firstly, for all antennas, the mutual information values of feature 2 are significantly lower than that of feature 1, indicating that feature 1 is a much more useful feature in regards to discriminating walking from running. This result makes physical sense, as feature 1, the average Doppler shift of the torso is directly related to target velocity. A main discriminator between walking and running is indeed velocity.

Secondly, antenna 3 overall possess higher mutual information values for both features, indicating that antenna 3, when processed individually, will yield better classification performance. Again, this is consistent with expectations, since the target motion vector sweeps between  $0^\circ$  to  $90^\circ$  the angle seen by antenna 3 changes between  $\pm 45^\circ$ , yielding spectrograms of sufficient quality to obtain reasonable feature estimates in most cases – hence, the higher the mutual information values. In the next section, these expectations are compared with actual classification results obtained using SVM.

Table 1. Mutual Information for Each Feature Extracted from Three Antenna Multistatic Radar

	Mutual Information		
	Antenna 1	Antenna 2	Antenna 3
Feature 1	0.5192	0.7124	0.8945
Feature 2	0.2218	0.2955	0.3156

#### IV. CLASSIFICATION RESULTS WITH SVM

Support vector machine (SVM) is a classification technique that separates data points into two classes by trying to fit linear or nonlinear surfaces such that the margin between the two classes is maximized. SVM determines the best, or maximum, margin is using the method of kernels [12].

In this work, classification is accomplished on simulated radar data generated from the CMU motion capture data of sixteen different people, with an equal amount of walking and running samples. The data from eight people is used for training, while the remaining eight are used to test the classification algorithm. Both Feature 1 and Feature 2 are extracted from the spectrograms of each antenna, and fed to the SVM algorithm, which is applied separately for each antenna. The classification performance for each antenna under three different feature selection cases is shown in Figures 7 – 9.

Figure 7 shows the classification performance when just feature 1 is used as a basis for classification. As would be expected from feature 1's higher mutual information value, good classification performance is achieved up until about a  $70^\circ$  aspect angle, when the measured spectrogram no longer yields distinguishable characteristics. Antenna 3, which possesses the best topology relative to target motion, has a 100% success rate.

Figure 8 shows the classification performance when just feature 2 is used as a basis for classification. Feature 2's mutual information values were quite low, and thus indicative of its relatively low impact on classification success. Thus, the inconsistent, and mostly poor, classification performance achieved by SVM is consistent with our computations utilizing information theory.

Figure 8 shows the classification performance obtained when both feature 1 and feature 2 are used as a basis for classification. Notice that the joint performance is better than that of when feature 2 is only used, but poorer than when just feature 1 was used. This corroborates the importance of information-based feature selection: blindly using all possible features does not necessarily yield better or optimal performance. In fact, these results show that using features that are somewhat irrelevant to the classification problem at hand actually degrades potential performance.

Thus, classification algorithms for radar networks – or, in fact for any sensor network – should be designed based on 1) the classification problem at hand, 2) the relevance of features, as given from mutual information, and 3) the quality of feature estimates, a parameter that is also indicated by the mutual information values computed over the entire network.

#### I. CONCLUSION

This paper presents an information theoretic approach for finding the importance ranking of features extracted for the purpose of classifying human micro-Doppler in radar sensor networks. Results show that the mutual information of features can be used to learn which features are more important to successful classification prior to the application of any classification algorithm. Mutual information is also

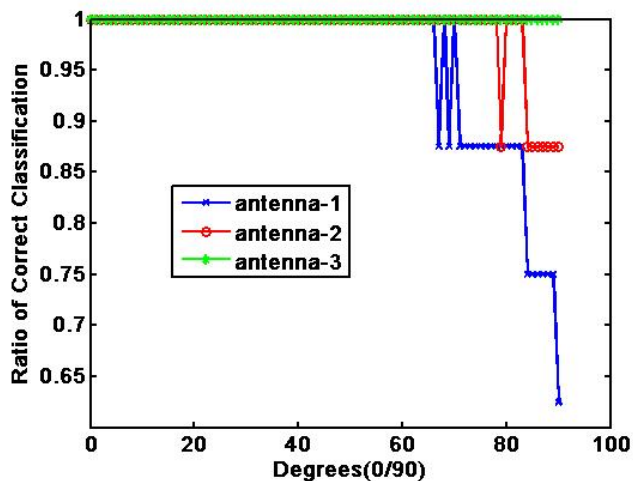


Figure 7. Classification results for feature 1 alone.

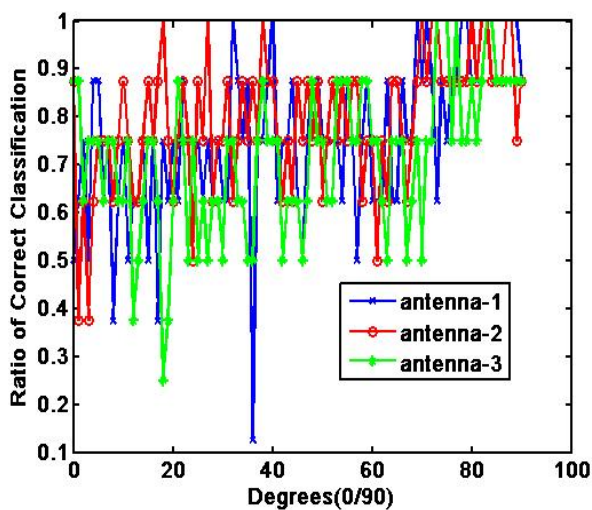


Figure 8. Classification results for feature 2 alone.

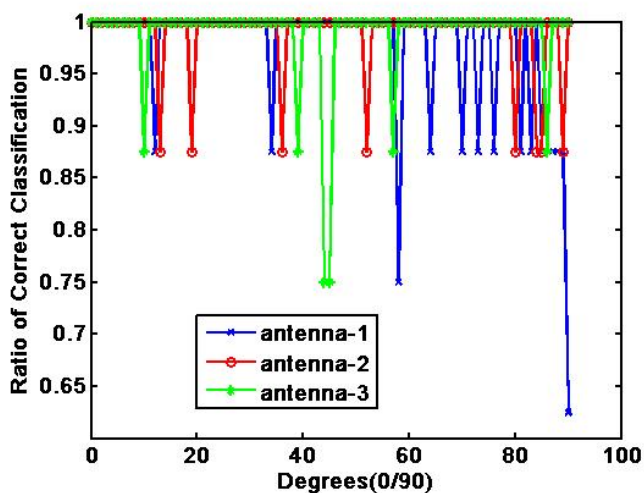


Figure 9. Classification results for feature 1 and feature 2 used jointly

able to give an indication of the quality of feature estimate and can thus be used to design knowledge-based, adaptive classification algorithms, which optimize feature selection based on time-varying conditions within the network. In future work, we plan to research the use of information theory in the design of optimal, data fusion algorithms for radar networks.

## REFERENCES

- [1] V.C. Chen, F. Li, S.-S. Ho, and H. Wechsler, "Micro-doppler effect in radar: phenomenon, model, and simulation study," *IEEE Trans. Aerospace and Electronics Systems*, Vol. 42, No. 1, 2006, pp. 2-21.
- [2] V.C. Chen, *The Micro-Doppler Effect in Radar*, Artech House, 2010.
- [3] T. Thayaparan, S. Abrol, and E. Riseborough, "Micro-doppler radar signatures for intelligent target recognition," Defense R&D Canada, DRDC Technical Memorandum 2004-170, Sept. 2004.
- [4] Y. Li, L. Du, H. Liu, "Moving vehicle classification based on micro-Doppler signature," in *Proc. IEEE International Conf. on Signal Processing, Communications, and Computing (ISCPCC)*, Sept. 2011.
- [5] T. Thayaparan, S. Abrol, E. Riseborough, L. Stankovic, D. Lamothe, and G. Duff, "Analysis of radar micro-Doppler signatures from experimental helicopter and human data," *IET Radar Sonar Navig.*, Vol. 1, No. 4, 2007, pp. 289-299.
- [6] A. Chilliers, and W. Nel, "Helicopter parameter extraction using joint time-frequency and tomographic techniques," in *Proc. IEEE International Conference on Radar*, Adelaide, 2008.
- [7] H. Sisan, Z. Yong-feng, Z. Hong-zhong, and Z. Jian, "Analysis of rotating structures for stepped frequency radar," in *Proc. IEEE International Conference on Radar*, Adelaide, 2008.
- [8] D. Tahmouh, and J. Silvius, "Remote detection of humans and animals," in *Proc. IEEE AIPR Workshop*, 2009.
- [9] M. Otero, "Application of a continuous wave radar for human gait recognition," in *Proc. of SPIE*, Vol. 5809, pp. 538-548, 2005.
- [10] M. S. Andric, B. P. Bondzulich, and B.M. Zrnica, "Feature extraction related to target classification for a radar Doppler echoes," in *Proc. 18th Telecommunications Forum (TELEFOR)*, Belgrade, Nov. 24-25, 2010.
- [11] Y. Kim and H. Ling, "Human activity classification based on micro-Doppler signatures using an artificial neural network," in *Proc. Int. Symposium of the Antennas and Propagation Society*, 2008.
- [12] Y. Kim and H. Ling, "Human activity classification based on micro-Doppler signatures using a support vector machine," *IEEE Trans. Geoscience and Remote Sensing*, Vol. 47, No. 5, 2009, pp. 1328-1337.
- [13] I. Orovic, S. Stankovic, T. Thayaparan, and L. Stankovic, "Multi-window s-method for instantaneous frequency estimation and its application in radar signal analysis," *IET Signal Processing*, vol. 4, no. 4, pp. 363-370, 2010.
- [14] I. Orovic, S. Stankovic, and M. Amin, "A new approach for classification of human gait based on time-frequency feature representations," *Signal Processing*, vol. 91, no. 6, pp. 1338-1456, 2011.
- [15] L. Liu, M. Popescu, M. Skubic, M. Rantz, "Automatic fall detection based on Doppler radar motion signature," in *Proc. of 5th Int. Conf. on Pervasive Computing Technologies for Healthcare*, 23-26 May, 2011.
- [16] S. Bjorklund, H. Petersson, A. Nezirovic, M.B. Guldogan, and F. Gustafsson, "Millimeter-wave radar micro-Doppler signatures of human motion," in *Proc. Int. Radar Symposium (IRS)*, Sep. 2011.
- [17] C. Hornsteiner and J. Detlefsen, "Extraction of features related to human gait using a continuous-wave radar," in *Proc. German Microwave Radar Conference*, 2008.
- [18] F.H.C. Tivive, A. Bouzerdoum, and M.G. Amin, "A human gait classification method based on radar Doppler spectrograms," *EURASIP Journal on Advances in Signal Processing*, Article ID 389716, 2010.
- [19] J. Li, S.L. Phung, F.H.C. Tivive, and A. Bouzerdoum, "Automatic classification of human motions using Doppler radar," in *Proc. IEEE World Congress on Computational Intelligence*, 2012.

- [20] G.E. Smith, K. Woodbridge, and C.J. Baker, "Naïve Bayesian radar micro-Doppler recognition," in *Proc. IEEE Int. Radar Conf.*, 2008.
- [21] B.G. Mobasser, M. G. Amin, "A time-frequency classifier for human gait recognition," in *Proc. SPIE*, May 5, 2009.
- [22] Y. Yang, J. Lei, W. Zhang, C. Lu, "Target classification and pattern recognition using micro-Doppler radar signatures," in *Proc. 7<sup>th</sup> Int. Conf. on Software Eng., Artificial Intelligence, Networking, and Parallel/Distributed Computing*, 19-20 June, 2006.
- [23] B. Lyonnet, C. Ioanna, M. Amin, "Human classification using micro-Doppler time-frequency signal representations," in *Proc. IEEE Radar Conference*, 2010.
- [24] G. Garreau, C.M. Andreou, A. Andreou, J. Georgiou, "Gait-based person and gender recognition using micro-Doppler signatures," in *Proc. IEEE Biomedical Circuits and Systems Conference (BioCAS)*, 2011.
- [25] J.A. Nanzer, R.L. Rogers, "Bayesian classification of humans and vehicles using micro-Doppler signatures from a scanning-beam radar," *IEEE Microwave and Wireless Components Letters*, vol. 19, no. 5, pp. 338-340, May 2009.
- [26] J.W. Imer, K.F. Bing, A.C. Sharma, E.F. Greneker, "Detecting concussion impairment with radar using gait analysis techniques," in *Proc. IEEE Radar Conference*, 2011.
- [27] M. Anderson, "Design of multiple frequency continuous wave radar hardware and micro-Doppler based detection and classification algorithms," *PhD Thesis*, University of Texas at Austin, May 2008.
- [28] Guo, Baofeng, and Mark S. Nixon. "Gait feature subset selection by mutual information." *Systems, Man and Cybernetics, Part A: Systems and Humans, IEEE Transactions on* 39.1 (2009): 36-46.
- [29] S.Z. Gurbuz, "Human Detection with Radar: Dismount Detection" in *Principles of Modern Radar: Advanced Techniques*, SciTech, 2012.
- [30] Van Dorp, P., and Groen, F.C.A., "Human walking estimation with radar", *IEE Proc. on Radar, Sonar and Nav.*, 150(5):356-365, 2003.
- [31] R. Boulic, M.N. Thalmann, and D. Thalmann, "A global walking model with real-time kinematic personification," *Visual Computing*, Vol. 6, 1990, pp. 344-358.
- [32] The Motion Research Laboratory, Carnegie Mellon University (CMU), <http://mocap.cs.cmu.edu>
- [33] C. Karabacak, S.Z. Gurbuz, and A.C. Gurbuz, "Radar simulation of human micro-Doppler signature from video motion capture data," in *Proc. of 21<sup>st</sup> IEEE Signal Processing and Communication Applications (SIU) Conference*, Girne, TRNC, 24-26 April, 2013.
- [34] Thomas M. Cover, Joy A. Thomas, "Elements of Information Theory," Wiley-interscience, Second Edition, 2006.
- [35] B. Tekeli, S.Z. Gurbuz, M. Yuksel, "Mutual Information of Features Extracted from Human Micro-Doppler," in *Proc. of 21<sup>st</sup> IEEE Signal Processing and Communication Applications (SIU) Conference*, Girne, TRNC, 24-26 April, 2013.
- [36] B. Tekeli, S. Z. Gurbuz, M. Yuksel, A. C. Gurbuz and M. B. Guldogan, "Classification of Human Micro-Doppler in a Radar Network," in *Proc. of 2013 IEEE Radar Conference*, Ottawa, Canada, April 2013.